

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>A01M 1/10, 1/14</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 97/18704</b> <b>(43) International Publication Date:</b> 29 May 1997 (29.05.97)
<b>(21) International Application Number:</b> PCT/GB96/02893 <b>(22) International Filing Date:</b> 22 November 1996 (22.11.96) <b>(30) Priority Data:</b> 9523995.0                      23 November 1995 (23.11.95)    GB <b>(71) Applicant (for all designated States except US):</b> UNIVERSITY OF SOUTHAMPTON [GB/GB]; Highfield, Southampton SO17 1BJ (GB). <b>(72) Inventor; and</b> <b>(75) Inventor/Applicant (for US only):</b> HOWSE, Philip, Edwin [GB/GB]; 14 Western Way, Alverstoke, Gosport, Hampshire PO12 2NG (GB). <b>(74) Agent:</b> BOULT WADE TENNANT; 27 Fumival Street, London EC4A 1PQ (GB).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> PEST TRAP  <div style="text-align: center;"> </div> <b>(57) Abstract</b> <p>A pest trap which comprises retaining means (9) and one or more members (3) having substantially smooth surfaces mounted above the retaining means, whereby a pest displaced from the smooth surface falls into the retaining means (9). The members with smooth surfaces may comprise rods or spheres which may optionally be coated with electrostatically charged powder.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

PEST TRAP

This invention relates to a pest trap.

5 A number of different types of pest trap are commonly in use. These include no-exit traps, traps with sticky retaining surfaces, traps with a knock-down insecticide and traps which electrocute, killing instantaneously.

10 Examples of the different types of trap include the Victorian trap, a no-exit trap which comprises a glass bowl with a central entrance beneath. The entrance projects up into the dome of the bowl and flies enter from below, then continue to fly upwards or outwards towards a source of light, thereby preventing their escape back out through the entrance. These are bulky, difficult to empty and clean  
15 and not very efficient because insects tend not to enter cavities without inducement.

Simple fly-paper provides a sticky trap, which is hung vertically and which retains flies on adhesive on its surface when they land. Insecticide traps are similar,  
20 being constructed from a material which retains insecticide that is absorbed on contact by the insects when they land on the surface of the trap. However, sticky paper covered with flies is unsightly and difficult to handle.

Another type of trap is described in International  
25 patent publication number WO94/00980. Insects land on a powder coated surface of a funnel on which they are unable to grip with their feet and so they slide down the funnel into a retaining box or sticky surface.

Electrical traps generally have a light source to  
30 attract the insects. The insects land on a metal grid charged to a high voltage and are electrocuted when they bridge the gap between this and an earthed surface. Use of a large grid at high voltage and the particulate debris of disintegrating insects which is shed into the air are  
35 undesirable and can be a health hazard, for example when used in food preparation areas. In addition, the powerful light source illuminating the grid area and used as an

attractant emits in the ultraviolet which can be damaging to vision.

5 In accordance with the present invention, a pest trap comprises retaining means; and one or more members having substantially smooth surfaces; wherein the or each member is mounted above the retaining means such that a pest displaced from the smooth surface falls into the retaining means.

10 The present invention has advantages over prior art traps in that it is a simple device which does not require a high voltage power supply and it exploits the natural inclination of pests to crawl over surfaces by providing a smooth member above retaining means with spaces so that insects land on the trap and slide off the smooth member  
15 into the retaining means, which can easily be emptied.

Preferably, the retaining means comprises opaque material. This is preferable for the user who does not see the accumulated trapped pests.

20 Preferably, the or each member is coated with electrostatically charged powder. This powder stops the pest from gripping, increasing the likelihood that the pest will fall into the retaining means.

Typically, the or each member comprises glass or plastics material.

25 At least one of the retaining means and the or each member may be provided with an attractant or toxic substance.

30 Preferably, the attractant is chosen from one of colour, food, food derived attractants or pheromones e.g. for houseflies, (Z)-9-tricosene pheromone.

Preferably, the toxic substance is a biologically active material.

The retaining means may further comprise a lining to which trapped pests adhere, such as an adhesive coating.

35 Alternatively, the trap further comprises an exit to permit pests to escape after being exposed to the toxic substance. By letting pests escape after exposure, they

can carry the toxic substance away and pass it on to other pests.

Preferably, the or each member is at least part spherical in cross-section.

5        Preferably, the trap comprises a plurality of members, spaced from one another.

These members are generally all the same shape in one trap, e.g. they could be spherical, tubular, diamond shaped or polyhedral.

10        The members may be arranged in a single row, but preferably, the members are arranged in two or more rows, displaced from one another. In this way the pests fall down through the gaps, but it is made more difficult for them to escape again.

15        Examples of pest traps in accordance with the present invention will now be described with reference to the accompanying drawings in which:-

Figure 1 is a perspective view of a trap according to the present invention;

20        Figure 2 is a cross section through the trap of Figure 1;

Figure 3 is a view from above of the trap of Figure 1;

Figure 4 is a perspective view of an alternative arrangement for a pest trap according to the invention;

25        and,

Figure 5 is a perspective view of another example of a trap according to the invention.

Figure 1 illustrates an example of a pest trap according to the invention. A rectangular container 1 having walls 10 and a base 11 made of plastic or glass, supports at the upper surface of the walls 10 several cylindrical rods 3. Each rod is substantially identical and made of transparent or semi-transparent plastics or glass. The rods 3 may be hollow or solid and are mounted, movably or fixedly, to the container 1 in two offset rows 4,5 spaced from one another. In addition, an attractant in

30

35

the form of a light source 7 powered by a battery 8 or mains supply is provided within the container and a sticky surface 9 on the base.

As can be seen in Figure 3, the appearance to an insect of the upper surface of the container 1 is of a continuous surface and the insect is encouraged to land and crawl over the rods 3 by the presence of a light source inside the container. Alternative ways to attract insects include using chemical stimuli such as pheromones, food, food derived additives, colour or visual markings, the colour or markings being applicable to the container 1 and/or the rods 3. Using any of these attractants would be effective even if the container and rods were made of opaque materials including polished metals or treated cardboard, which provides an insulating substrate.

The rods 3 and interior of the container 1 are coated with material which render their surfaces slippery to the insect, for example, electrostatically charged powders, Teflon<sup>TM</sup>, or PTFE.

Another example is shown in Figure 4. In this case the container has a cylindrical wall 12 and a circular base 13. Mounted at the top of the wall 12 are multiple layers 14,15,16 of spheres 17 made of transparent glass or plastics. At the base of the container is a layer of glue 18 for retaining insects which fall onto it and a light source 20 powered by a battery 19 or mains supply to attract the insects. The light is visible through the transparent spheres.

The surfaces of the spheres form openings through which insects of an appropriate size will fall. The spheres in each layer are juxtaposed and arranged such that gaps in one layer 15 are offset from gaps in adjacent layers 14,15. The spheres have smooth surfaces and are coated with a slippery material as described above. Small black markings 21 on the surface of the spheres and attractants, such as feeding attractant (sugar or proteins) or pheromones (e.g. (Z)-9-tricosene for houseflies),



encourage insects to land. They are then entrapped by the glue layer 18.

5 The multiple layer arrangement 14,15,16 provides a physical barrier making escape difficult. This physical barrier is enhanced by coating the wall 12 of the container with slippery material as described above.

10 Variants of the traps described above are feasible. For example the shape of the members may be hemispheres, diamonds or polyhedra in place of the spheres; rods having triangular or other polyfaceted cross-sections; and in curved, circular or spiral form. Insects may be retained within the container in various ways other than using adhesive as described above, such as by lining the inside of the container with a chemical or biological insecticide,  
15 a layer of powder, a fluid or desiccant.

In other cases as shown and described with respect to Figure 5, it may be preferred that the insects are allowed to escape again after coming into contact with a biologically active chemical which they can spread amongst  
20 the insect population. In this example, a number of diamond cross section rods 22 are arrayed, spaced from one another, above a container 23. A base 24 of the container comprises flaps 25,26 which are inclined with respect to sides 27,28 of the container. These flaps are arranged  
25 such that there is a space between them at the bottom of the container and optionally at either end forming an exit 29. Each of the flaps 25,26 is coated with a biologically active material 30 which attaches itself to the insects as they fall through between the rods and crawl to the exit,  
30 so that the insects can carry this on their bodies and spread it to other insects.

Sometimes insects are trapped to be used for research purposes, so no toxic products would be included in the container and the flaps would only be opened when the  
35 insects are being transferred to another storage container.

Experimental data has been obtained for a trap of the type shown in Figure 4 by releasing 100 houseflies (Musca

domestica) into a standard housefly testing room of approximately 30m<sup>3</sup> maintained at a temperature of 25°C ± 2°C. A trap was placed in the centre of the room. The trap was coloured yellow and black spots were placed in the centre of each of the upper spheres to provide visual attraction. The spheres were also coated with (Z)-9-tricosene to attract flies by odour. The number of flies caught in a 24 hour period using constant lighting was monitored and are as shown in the table below. This can be compared with the results for a conventional trap. Parallel tests were done in an empty office of similar size and then a further set of tests in an empty office for 13 hours light followed by 11 hours light.

It can be seen from the results in the test room that at the end of 24 hours all the flies had been trapped using the trap of the present invention. In the empty office using 13 hours lighting, 98% had been trapped and in the example of an office using 24 hours lighting 80% were caught in the trap. By comparison from the results for a conventional insecticide impregnated cardboard trap in a standard fly room it can be seen that only 45% of the flies present are trapped.

**Table: No of houseflies trapped in a trap with spheres over a 24 hour period**

Hours after start	Test room 24 h light	Empty office (24 h light)	Empty office (13 h light)	Conventional Trap
1	10	15	21	2
2	12	32	43	5
3	25	57	56	10
4	38		66	13
5	48	87	73	23
6	55		79	25
7	67		75	29
8	76		78	29
24	100	80	98	45

CLAIMS

1. A pest trap, the trap comprising retaining means; and one or more members having substantially smooth surfaces; wherein the or each member is mounted above the retaining means, such that a pest displaced from the smooth surface falls into the retaining means.
2. A pest trap according to claim 1, wherein the retaining means comprises opaque material.
3. A pest trap according to claim 1 or claim 2, wherein the or each member is coated with electrostatically charged powder.
4. A pest trap according to any preceding claim wherein the or each member comprises glass or plastics material.
5. A pest trap according to any preceding claim wherein at least one of the retaining means and the or each member is provided with an attractant or toxic substance.
6. A trap according to claim 5, wherein the attractant is chosen from one or more of colour, food, food derived attractants or pheromones.
7. A trap according to claim 5, wherein the toxic substance comprises a biologically active material.
8. A trap according to any preceding claim wherein the retaining means further comprises a lining to which trapped pests adhere.
9. A trap according to claim 5, further comprising an exit to permit pests to escape after being exposed to the toxic substance.

10. A pest trap according to any preceding claim , wherein the or each member is at least part spherical in cross-section.

5 11. A pest trap according to any preceding claim, comprising a plurality of members, spaced from one another.

10 12. A pest trap according to claim 11, wherein the members are arranged in two or more rows displaced from one another.

FIG. 1.

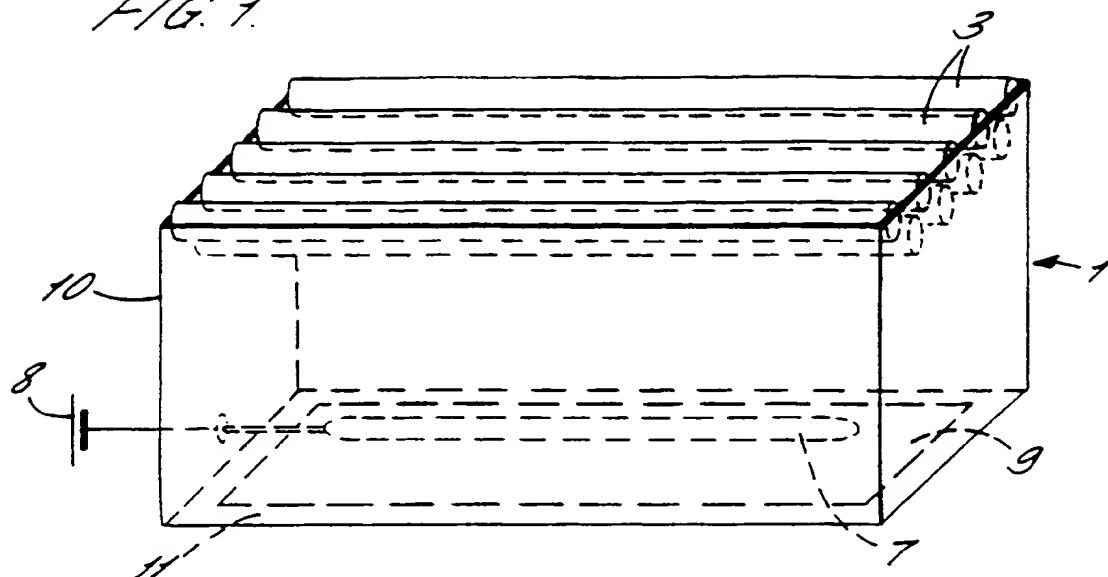


FIG. 2.


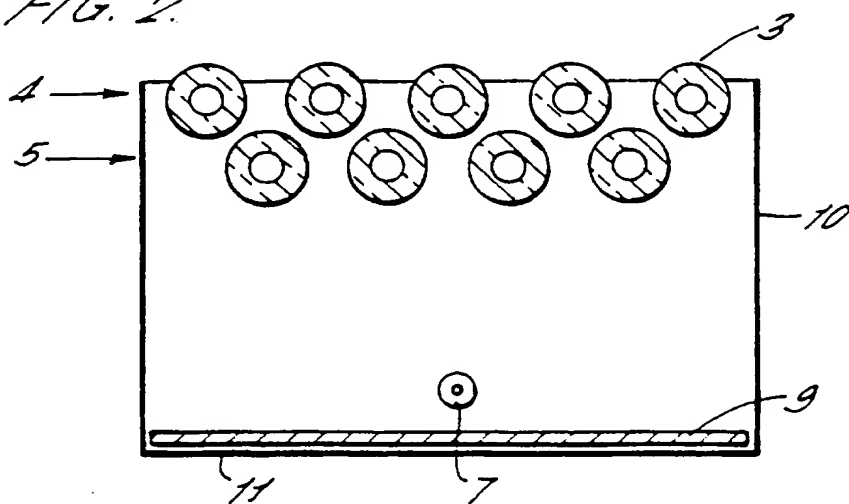


FIG. 3.

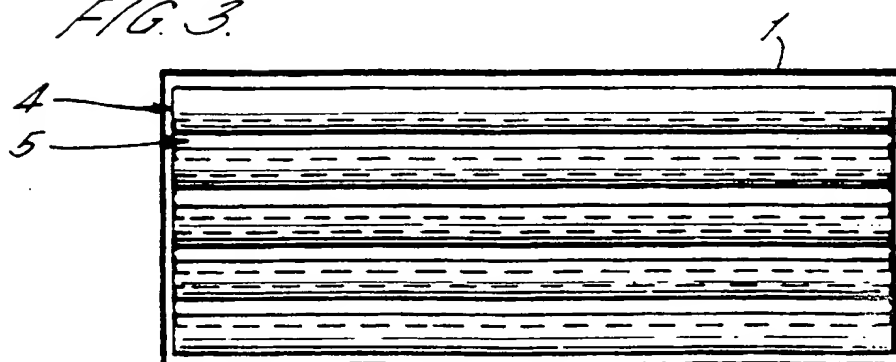

SUBSTITUTE SHEET (RULE 26)

FIG. 4.


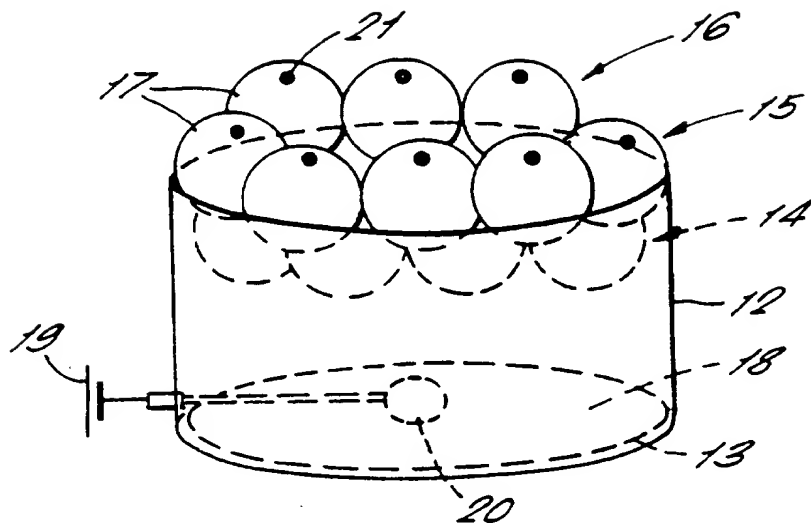


FIG. 5.

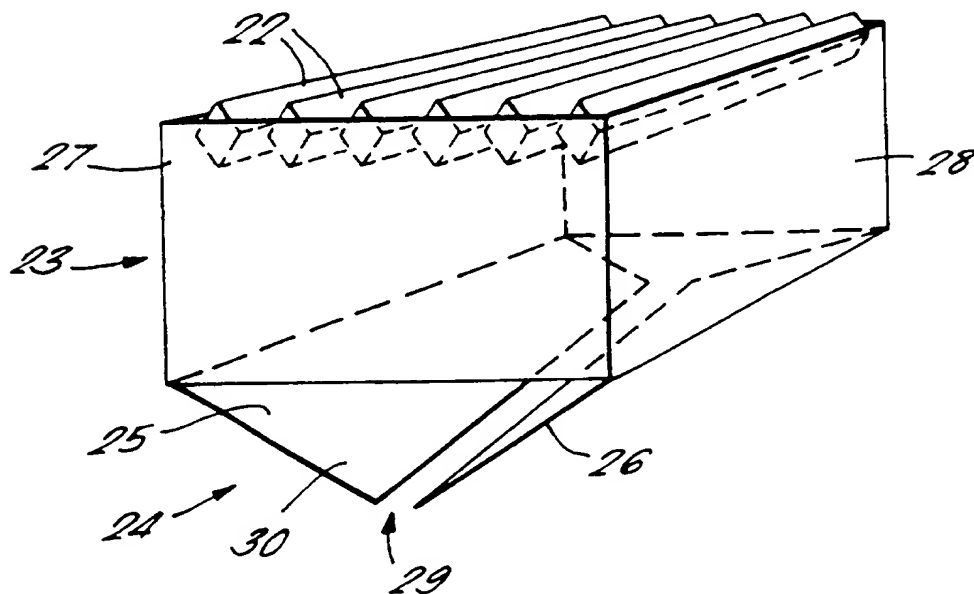

**SUBSTITUTE SHEET (RULE 26)**

## INTERNATIONAL SEARCH REPORT

National Application No  
PCT/GB 96/02893A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 A01M1/10 A01M1/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 A01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 94 00980 A (UNIV SOUTHAMPTON ;HOWSE PHILIP EDWIN (GB)) 20 January 1994 cited in the application see page 5, line 7 - page 8, line 12 see page 11, line 4 - page 11, line 36 see page 12, line 6 - page 14, line 12 see claims; figures ---	1,3,5,7, 8
X	US 4 505 065 A (NIEMEYER HANS) 19 March 1985 see column 2, line 34 - line 64 see claims; figures ---	1,4,5
X	US 4 030 233 A (WUNSCH E ANTON E) 21 June 1977 see column 1, line 61 - column 2, line 23 see column 2, line 46 - column 4, line 6 see claims; figures ---	1,4,5

-/-

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

11 February 1997

Date of mailing of the international search report

03.03.97

Name and mailing address of the ISA

European Patent Office, P.O. 5818 Patendaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Pirou, J-C



# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 96/02893

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>US 4 263 740 A (HEMSARTH W LANCE H ET AL)  28 April 1981  see column 2, line 1 - column 3, line 41  see claims; figures  -----</p>	1,3-5,8

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 96/02893

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9400980	20-01-94	AU-B- 669727	20-06-96
		AU-A- 4575693	31-01-94
		CA-A- 2140015	20-01-94
		EP-A- 0650322	03-05-95
		GB-A- 2268676	19-01-94
		JP-T- 7508882	05-10-95
-----			
US-A-4505065	19-03-85	DE-A- 3303889	23-02-84
		AT-B- 386320	10-08-88
		CA-A- 1198592	31-12-85
		SE-B- 455460	18-07-88
		SE-A- 8302278	21-02-84
-----			
US-A-4030233	21-06-77	NONE	
-----			
US-A-4263740	28-04-81	NONE	
-----			